

Cold Holdings 25" Cold Holding Refrigerator

SKDL25-ESUS2

Specification Sheet



Features

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

High-Strength Door

Heavy-duty, stainless steel door is assembled using high-load brackets for long lasting durability

Easy to Clean

Stainless steel interior, coved corners, finished edges

Stainless Steel Exterior

Galvanized back and stainless steel bottom to reduce the risk of corrosion

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

Cold Wall Refrigeration System

Optimized temperature control thanks to the cold wall refrigeration

Front Access Dispense Point

Includes a wide, front-access flapper door for easy access to fresh produce while maintaining an optimal holding environment

Cabinet Capacity

Internal area of 4.7ft³ with one product bin with removeable lid and front access door

Versatility


Standard countertop design includes optional wall mount accessory to free up counterspace





Cold Holdings 25" Cold Holding Refrigerator SKDL25-ESUS2

Specification Sheet

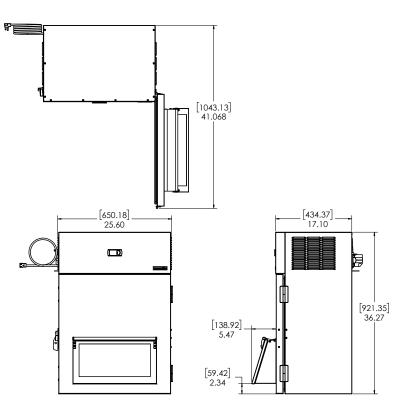

Technical Specifications

Electrical Requirements	115v/60hz/1ph/3A/NEMA 5-15P Plug	Temperature Range	36 to 40 (2.2 to 4.4°C)
Product Dimensions	25.6"W x 36.27"H x 23.57"D (65.02cm x 92.13cm x 59.87cm)	Insulation	Foamed-in-place, CFC-free polyurethane
Product Weight	130lbs (58.97kg)	Exterior Construction	Stainless steel exterior with galvanized back and bottom
Shipping Dimensions	(36.97kg) 31"W x 45"H x 32"D (78.74cm x 114.30cm x 81.28cm)	Interior Construction	Stainless steel interior with coved corners and finished edges
		Doors	One (1) right-hand swing door, reversible
Shipping Weight	145lbs (65.77kg)	Interior Capacity	4.7 cubic feet
Shipping Cubic Dimensions	25.83ft ³ (0.73m ³)	Certifications	ETL Safety, ETL Sanitation
		Warranty	1-year parts and labor, 5-year compressor (part only)
Refrigerant	R290		
Charge Level	1.9oz (53.9 grams)		

Model Number	Description	
SKDL25-ESUS2	Cold holding Refrigerator 25", 115v/60hz/1ph, single right-hand swing door, product bin, NEMA 5-15P	

To learn more about Cold Holding Refrigerator, visit silverking.com

