



Features

Eco-Friendly Refrigerant

R290 refrigerant with a global warming potential (GWP) of 3

Easy to Clean

Aluminum interior, coved corners, finished edges, plus full-extension and easy lift out drawers

Flat Top with Backsplash

3" backsplash provides a backstop for countertop equipment while protecting your walls

Large Work Surface

29" deep stainless steel work surface for menu assembly

High-Strength, Full-Extension Drawers

Premium slide and framework construction promotes lateral stability while offering high dynamic load capacities and a stay-shut feature

Long-Lasting, Removable Gaskets

Santoprene™ gaskets last four times longer than standard gaskets

High-Efficiency Refrigeration System

Forced air circulation provides uniform temperature throughout the cabinet while automatic defrost self-manages ice buildup and evaporates moisture

Drawer Capacity

Each large drawer accommodates two (2) full-size 12" W x 20" D x 4" H and one (1) 1/2 size 6" W x 20" D x 4" H hotel pans. Each smaller drawer accommodates two (2) full-size 12" W x 20" D x 6" H hotel pans. Additional pan adapters are available for fractional pans

Heavy-Duty Soft Casters


Secured to a 12 gauge steel base to ensure years of worry-free operation

Stainless Steel Exterior

Galvanized back and bottom to reduce the risk of corrosion

High-Density Insulation

Foamed-in-place, CFC-free polyurethane insulation for maximum strength, rigidity, and insulation

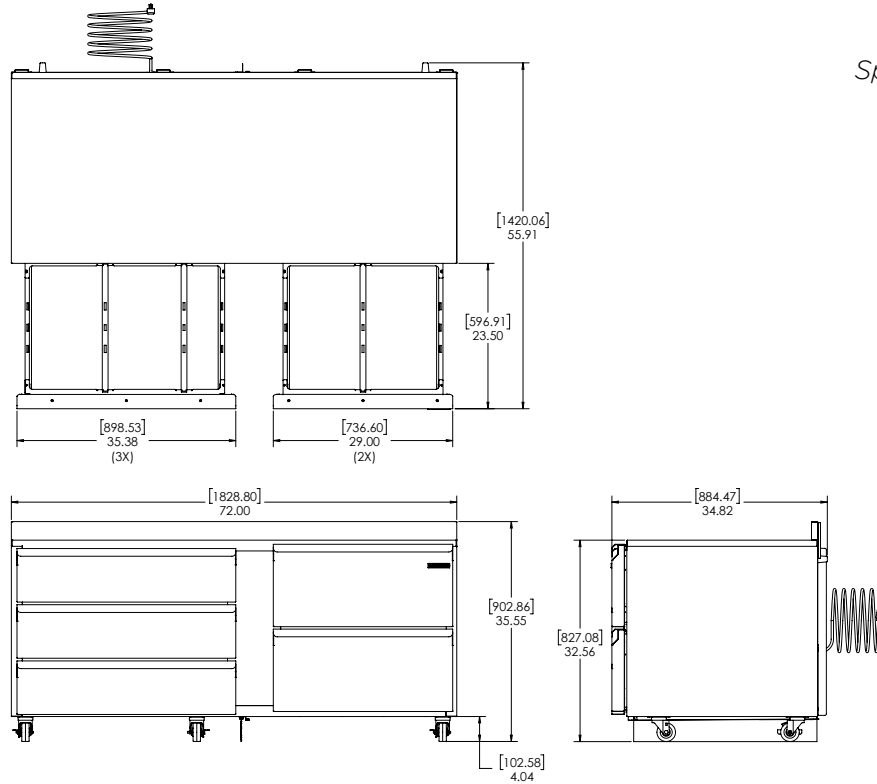

Technical Specifications

Electrical Requirements	115v/60hz/1ph/NEMA 5-15P Plug
Product Dimensions	72"W x 35.55"H x 34.82"D (182.88cm x 90.30cm x 88.44cm)
Product Weight	500lbs (226.80kg)
Shipping Dimensions	72"W x 40"H x 38"D (182.88cm x 101.60cm x 96.52cm)
Shipping Weight	575lbs (260.82kg)
Shipping Cubic Dimensions	67.73ft ³ (1.92m ³)
Temperature Range	-5 to 5 (-20.6 to -15°C)
Refrigerant	R290
Charge Level	4.59oz (130 grams)

Insulation	Foamed-in-place, CFC-free polyurethane
Exterior Construction	Stainless steel exterior with galvanized back and bottom
Interior Construction	Aluminum interior with coved corners and finished edges
Drawers	Five (5) high-strength, full-extension drawers with dividers
Interior Capacity	Accommodates four (4) full-size 12" W x 20" D x 6" H hotel pans, six (6) full-size 12" W x 20" D x 4" H hotel pans, and three (3) 1/2 size 12" W x 20" D x 4" H hotel pans
Drawer Gasket	Santoprene™ gasket
Casters	Six (6) 4" heavy-duty soft casters (three locking)
Certifications	ETL Safety, ETL Sanitation
Warranty	3-year parts and labor, 5-year compressor (part only)

Model Number	Description
SKF72-EDUS1	Undercounter Freezer 72", 115v/60hz/1ph, 5 drawer, 4" heavy-duty soft casters (three locking), NEMA 5-15P

Accessories	Description
25567	Adapter Bars for Fractional Pans
43581	Pan 1/6 Size, 4" Deep Plastic
43643	Pan 1/6 Size, 6" Deep Plastic
27066	Pan 1/3 Size, 4" Deep Plastic
26415	Pan 1/3 Size, 6" Deep Plastic

To learn more about **Undercounter Freezer**, visit silverking.com